



PROJ: 70028 OLD AS OF 070610.dwg
 PEN: ..\..\..\..\..\Pen\SW_PENTABLE.TBL
 USER: elocaw
 DATE: 9/27/2011
 DGN: ..\STANDARD\Curent\Nsp210.dgn

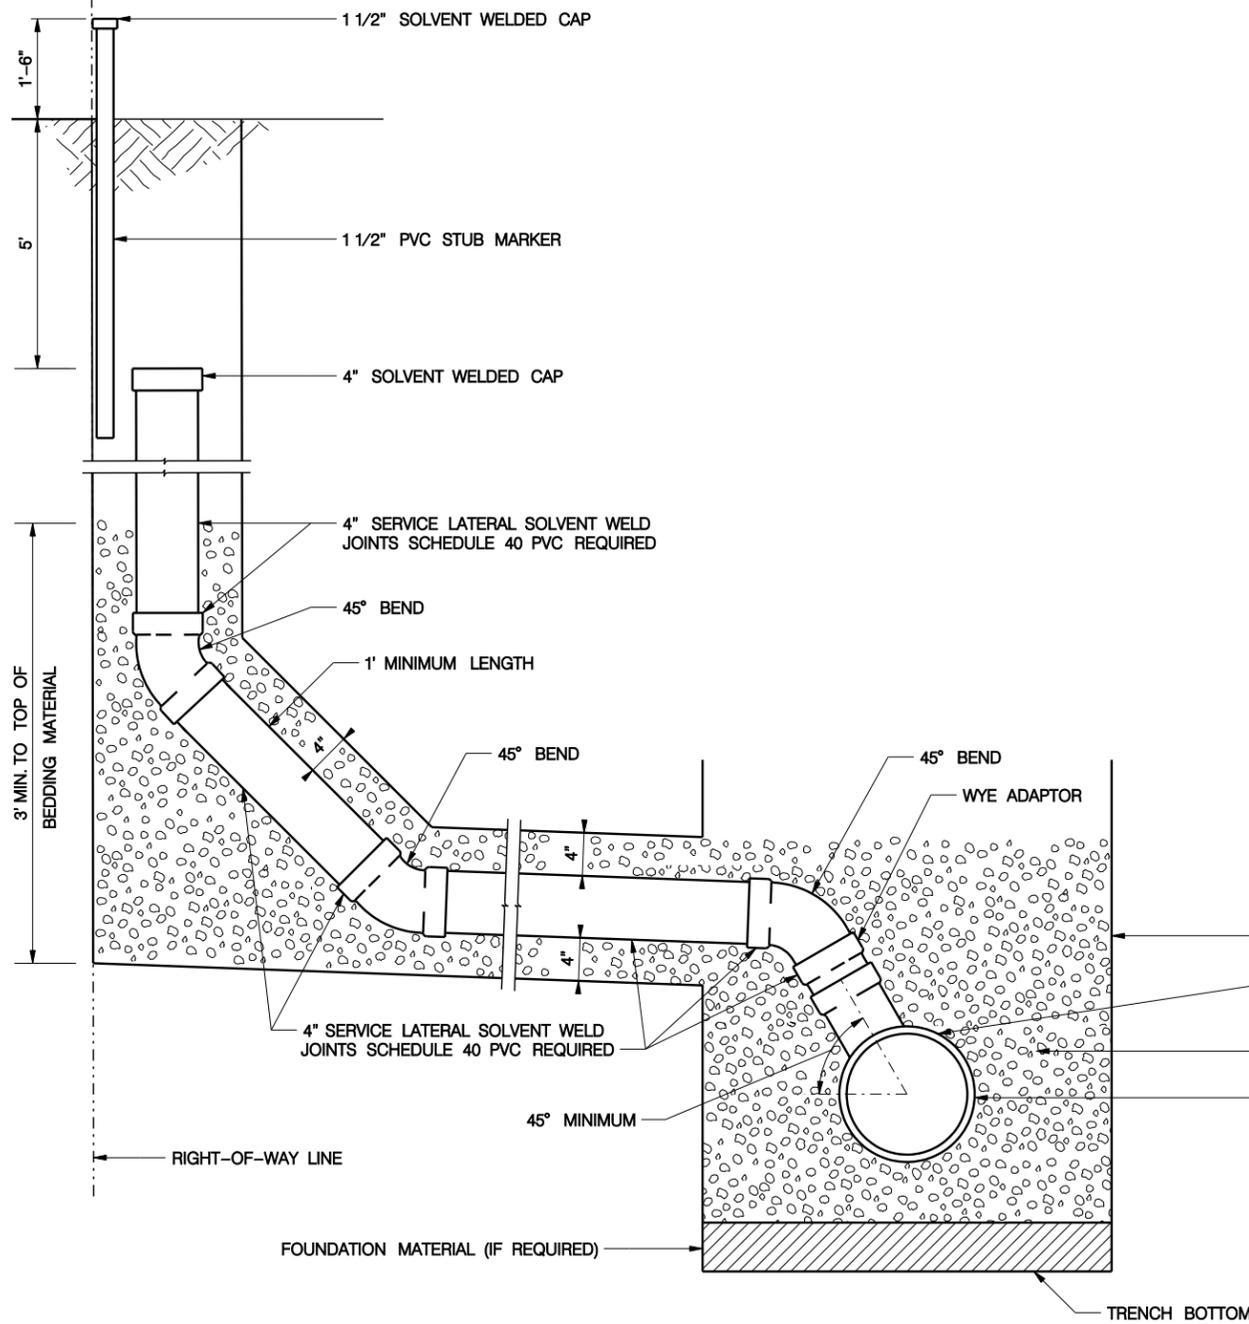

DETAIL OF
SEWER SERVICE CONNECTION

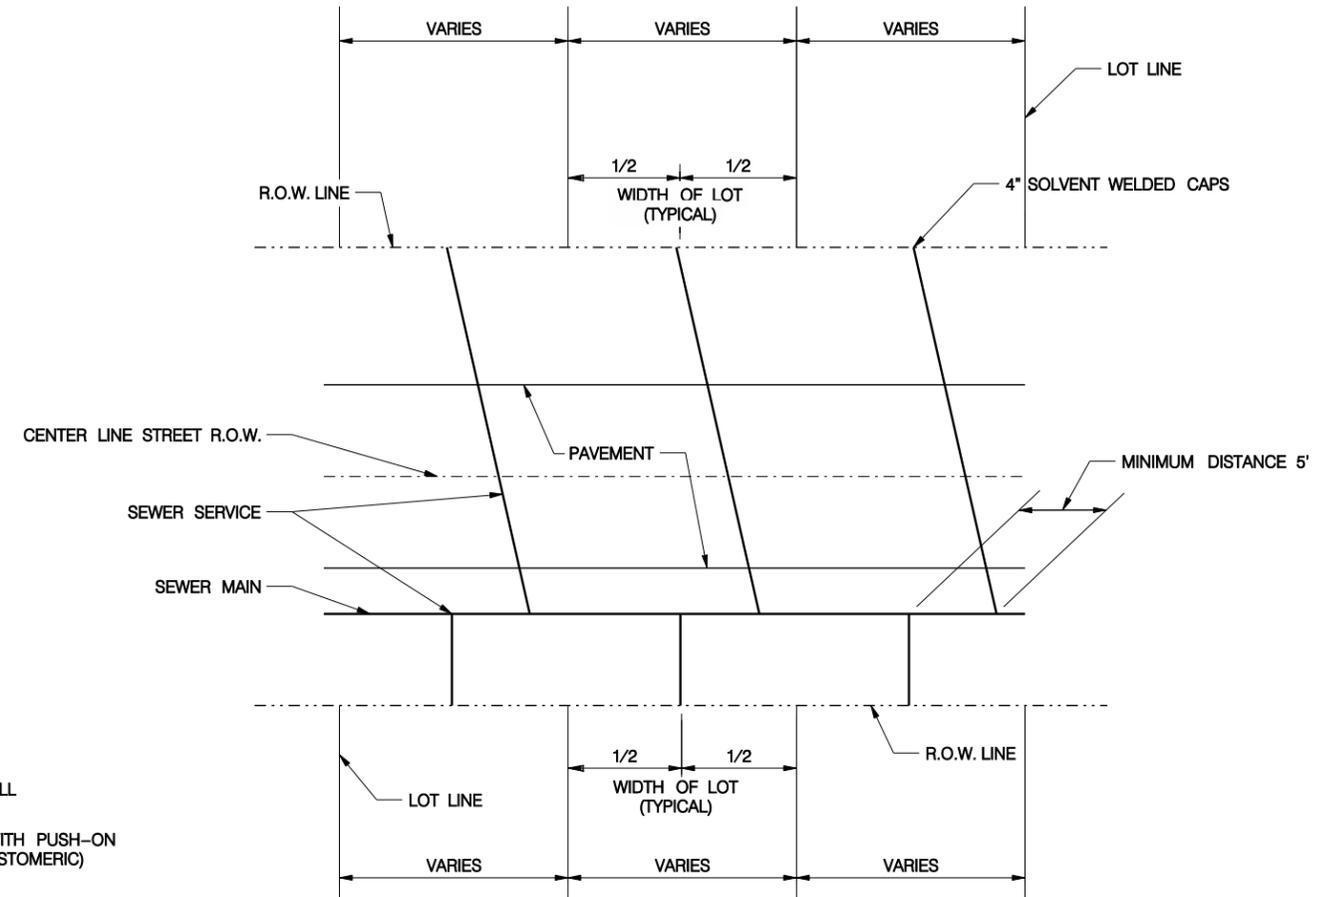

PLAN OF
WASTEWATER SERVICE LOCATIONS

GENERAL NOTES:

SERVICE WYE SHALL BE INSTALLED SO THAT SERVICE CONNECTION IS AT LEAST 45 DEGREES FROM HORIZONTAL

SERVICE LINE SHALL BE EXTENDED VERTICALLY AT PROPERTY LINE AND TERMINATED 5' BELOW FINISHED GRADE

SOLVENT WELDED CONNECTIONS ARE REQUIRED FOR THE ENTIRE SEWER SERVICE CONNECTION FROM LINE WYE TO THE CAP

MINIMUM GRADE FOR SERVICE LATERAL IS 1/8" PER FOOT (.01" PER FOOT)



**WASTEWATER SERVICE
 L.S.P. 210**