ADDENDUM NO. 4
City of Lincoln
"O" Street, 2nd Street to 9th Street (Harris Overpass)
Bridge C.I.P. #701781
State Project BR-5266(1) CN 12572
SPEC. NO. 07-186
June 22, 2007

TO ALL PROSPECTIVE BIDDERS:

Note: Bidders are instructed to attach this page of Addendum No. 4 to the inside cover of the contract folder and to sign and fax to Mary Lowe (402-441-6576), as evidence that this Addendum No. 4 has been received. Failure to do so may result in the rejection of the Bid.

_____
Company/Contact Person

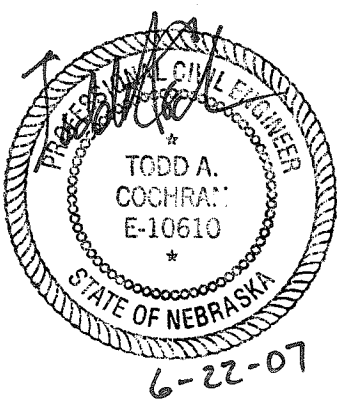

ADDENDUM NO. 4
City of Lincoln
"O" Street, 2nd Street to 9th Street (Harris Overpass)
Bridge C.I.P. #701781
State Project BR-5266(1) CN 12572
SPEC. NO. 07-186
June 22, 2007

1. QUESTIONS

The following are questions submitted to the Purchasing Agent along with answers:

Question 1:
What are the properties of the soil behind the proposed granular backfill?
Answer to Question 1:
Soil borings were not performed in the fill material beneath the pavement behind the existing retaining walls. However, borings were performed in the soils surrounding these areas. The Contractor shall use information in the soils report where applicable. For properties of existing retained soil directly behind the existing retaining walls, Contractor may assume the following values:

Friction angle: 24 degrees
Unit weight: 125 lbs/cubic foot

These values are assumptions for bidding purposes only and shall be field verified by the Contractor prior to construction. No additional payment shall be made for this field verification.

Question 2:
Are GeoPiers an option for the intermediate foundation improvements on the east end of the Bridge?
Answer to Question 2:
The intermediate foundation improvement special provision has been amended as shown in this Addendum No. 4.

Question 3:
If the area of the footprint for the intermediate foundation improvements needs to increase to accommodate the final wall design, will the Contractor be compensated for any additional intermediate foundation improvements area which may be required?
Answer to Question 3:
No additional payment shall be made for additional foundation improvement area identified to be necessary after the bid.

2. DRILLED SHAFTS AND ROCK SOCKETS

The following shall be appended to the Special Provisions section Drilled Shafts and Rock Sockets, subsection 14.0, Basis of Payment:

-----Begin Section-----

If excavated material from the drilled shaft construction is found to be contaminated, cannot be used as backfill on-site because of such contamination, and must be hauled off, the work required to haul this material off-site and associated landfill fees shall be considered "Extra Work."

-----End Section-----

3. INTERMEDIATE FOUNDATION IMPROVEMENTS AND INTERMEDIATE FOUNDATION IMPROVEMENTS VERIFICATION PROGRAM

The second sentence in the first paragraph of section 01.C beginning, "The Contractor shall be limited to non-vibratory methods…." shall be completely removed and replaced with the following:

-----Begin-----

The Contractor shall use an intermediate foundation improvement system which will not cause damage to the adjacent and surrounding buildings or foundations. The Contractor shall be responsible for selecting the system and for all damages resulting from the construction of the intermediate foundation system.

-----End-----

4. SPECIAL STREET LIGHT TYPE E

Special Street Light Type E shall be 70 Watts and not 175 Watts as shown in the plans.

PROFESSIONAL CIVIL ENGINEER
TODD A. COCHRAN
E-10610
STATE OF NEBRASKA
6-22-07