


CONCRETE BIKEWAY, 5" THICK		
STATION TO STATION	SIDE	SQ. FT.
766+16.79 - 768+93.01	RT.	2,689
769+84.84 - 771+00.00	RT.	1,067

CONCRETE SIDEWALK, 4" THICK		
STATION TO STATION	SIDE	SQ. FT.
766+16.79 - 769+10.58	LT.	1,456
769+64.81 - 771+00.00	LT.	676

REINFORCED CONCRETE RETAINING WALL				
STATION TO STATION	TYPE	SIDE	CONCRETE (CU. YDS.)	REINF. STL. (LBS.)
766+80.00 - 768+93.15	'B'	LT.	84	3600
766+16.79 - 768+75.38	'C'	RT.	11	415

48" PIPE RAILING FENCE, (In Place)		
STATION TO STATION	SIDE	LIN. FT.
766+80.00 - 768+93.15	LT.	295

NOTE: SEE RETAINING WALL PLAN & PROFILES

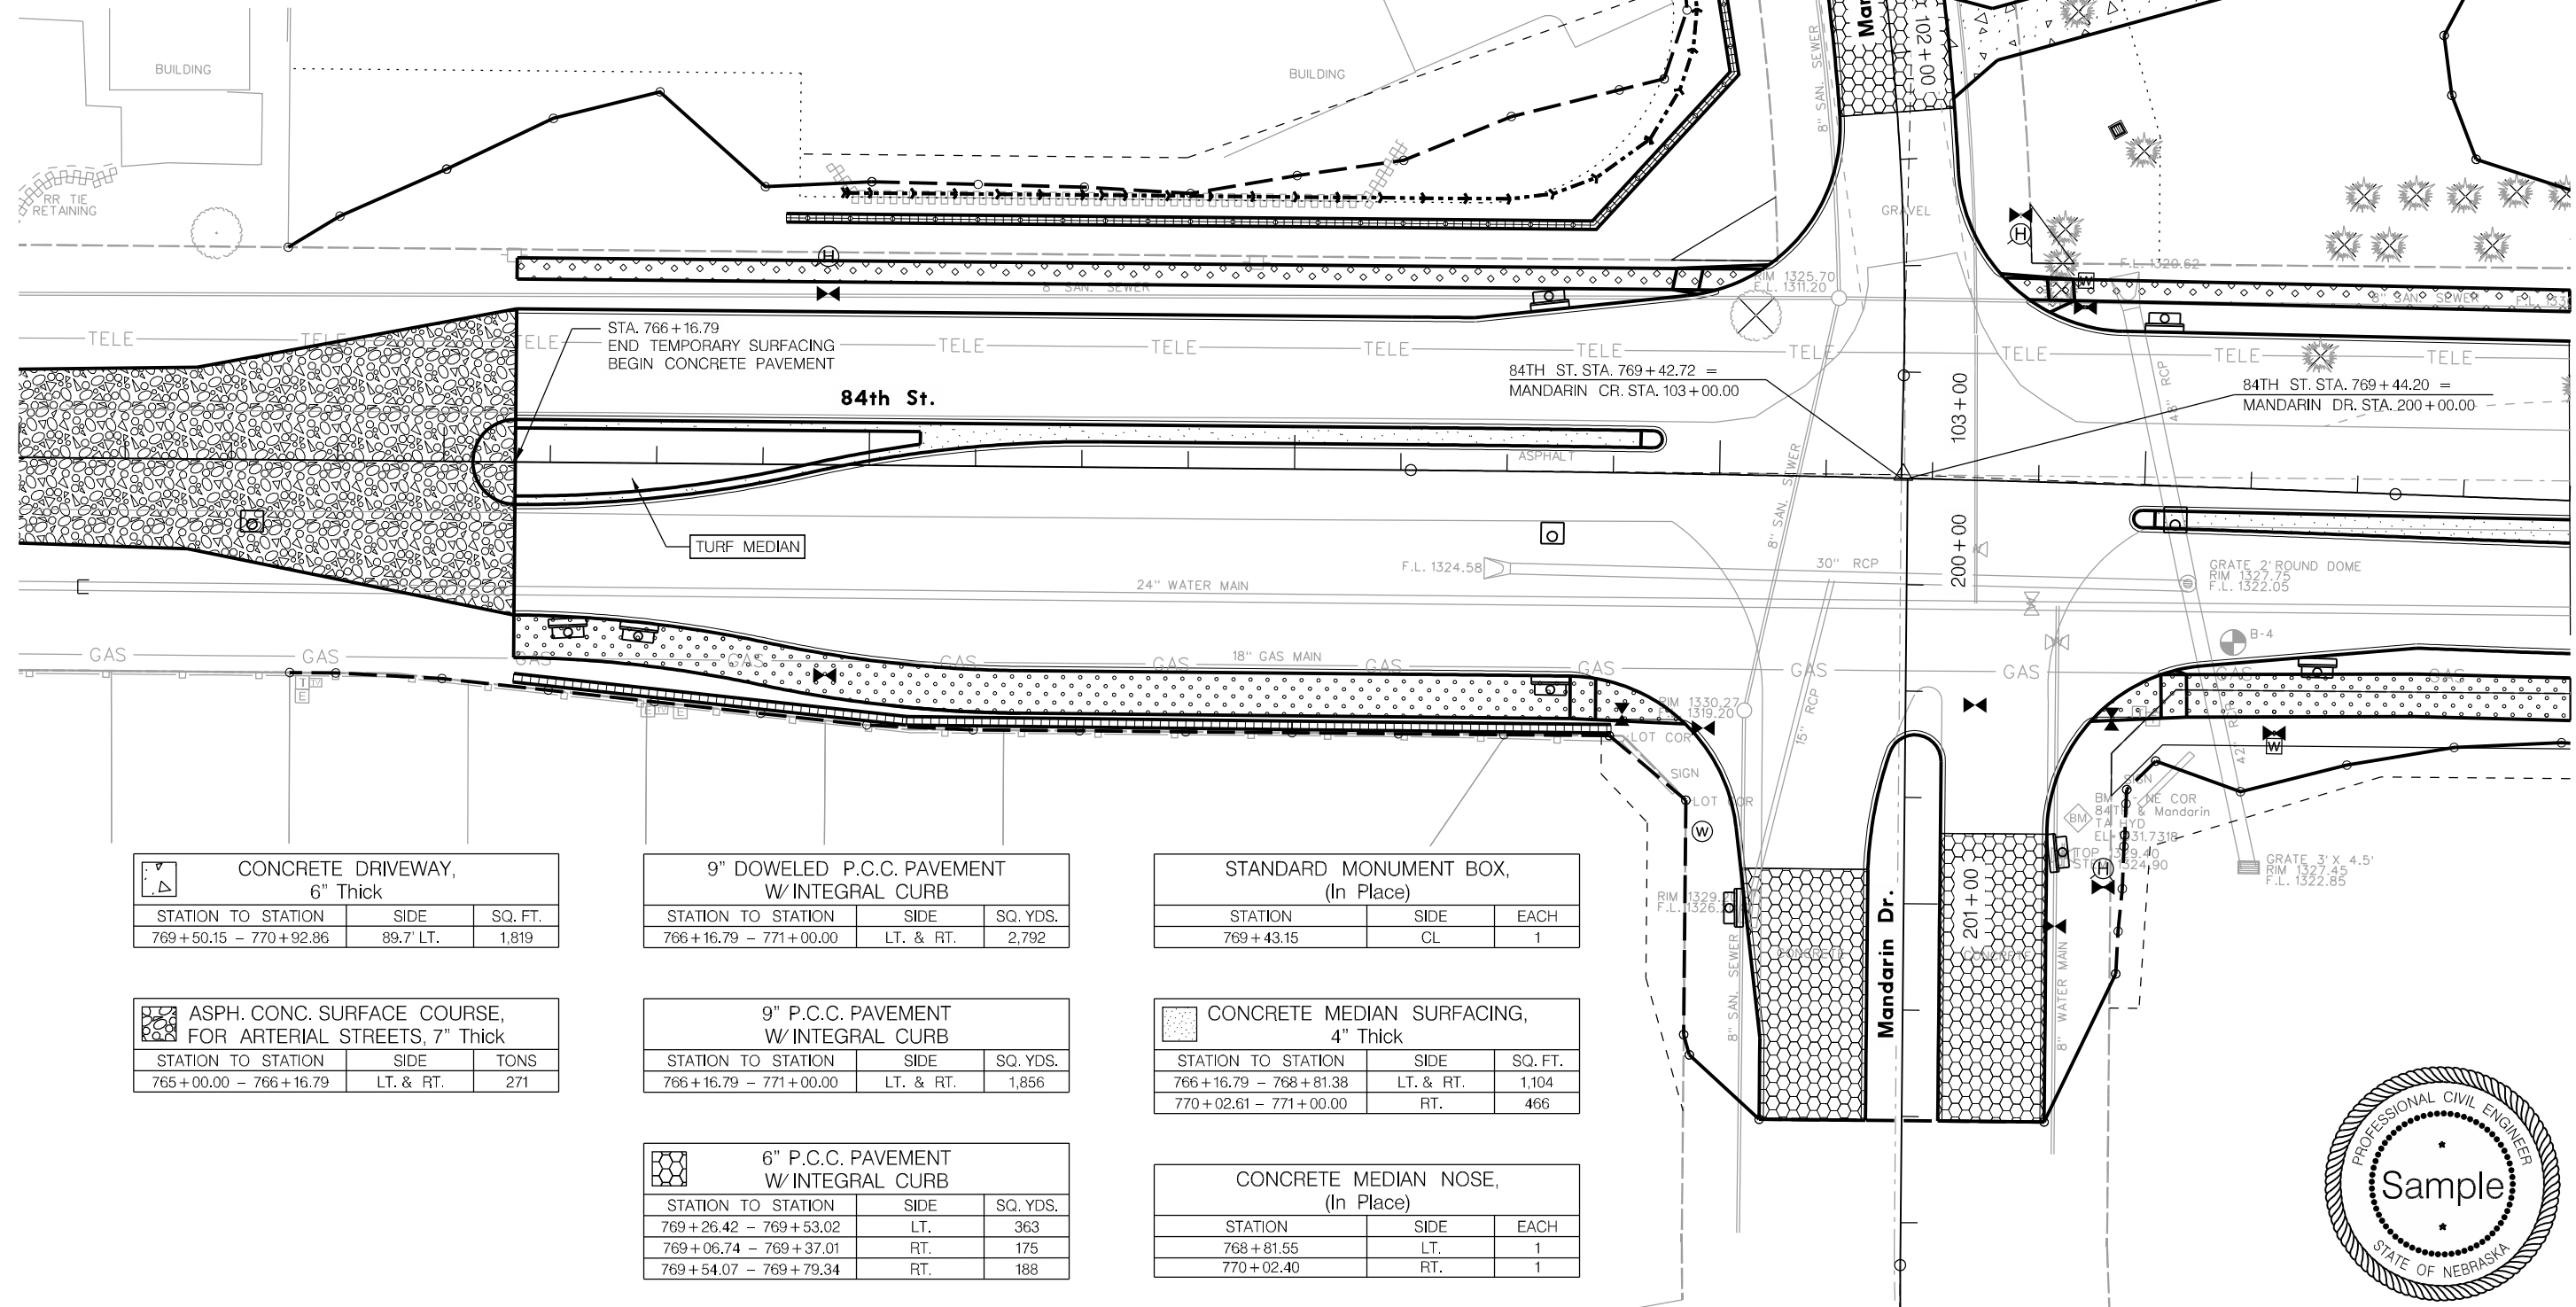

CONCRETE DRIVEWAY, 6" Thick		
STATION TO STATION	SIDE	SQ. FT.
769+50.15 - 770+92.86	89.7' LT.	1,819

9" DOWELED P.C.C. PAVEMENT W/ INTEGRAL CURB		
STATION TO STATION	SIDE	SQ. YDS.
766+16.79 - 771+00.00	LT. & RT.	2,792

STANDARD MONUMENT BOX, (In Place)		
STATION	SIDE	EACH
769+43.15	CL	1

ASPH. CONC. SURFACE COURSE, FOR ARTERIAL STREETS, 7" Thick		
STATION TO STATION	SIDE	TONS
765+00.00 - 766+16.79	LT. & RT.	271

9" P.C.C. PAVEMENT W/ INTEGRAL CURB		
STATION TO STATION	SIDE	SQ. YDS.
766+16.79 - 771+00.00	LT. & RT.	1,856

CONCRETE MEDIAN SURFACING, 4" Thick		
STATION TO STATION	SIDE	SQ. FT.
766+16.79 - 768+81.38	LT. & RT.	1,104
770+02.61 - 771+00.00	RT.	466

6" P.C.C. PAVEMENT W/ INTEGRAL CURB		
STATION TO STATION	SIDE	SQ. YDS.
769+26.42 - 769+53.02	LT.	363
769+06.74 - 769+37.01	RT.	175
769+54.07 - 769+79.34	RT.	188

CONCRETE MEDIAN NOSE, (In Place)		
STATION	SIDE	EACH
768+81.55	LT.	1
770+02.40	RT.	1



USER: sjanso DATE: Wednesday, March 17, 2004 DGN: ...DESIGN(SHEETS)120466CON.dgn

123-4-56

123-4-56